

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
18 January 2001 (18.01.2001)

PCT

(10) International Publication Number  
**WO 01/04665 A2**

(51) International Patent Classification<sup>7</sup>: **G02B**

(21) International Application Number: PCT/KR00/00760

(22) International Filing Date: 13 July 2000 (13.07.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
1999/28253 13 July 1999 (13.07.1999) KR

(71) Applicant (for all designated States except US): **KOREA INSTITUTE OF SCIENCE AND TECHNOLOGY** [KR/KR]; #39-1 Hawolgok-dong, Sunbuk-gu, Seoul 136-791 (KR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SON, Jung, Young** [KR/KR]; #301 201, Hanyangmacul Grand

Villd. 111, Gumi-dong, Bundang-gu, Sungnam-City, Kyeonggi-do 463-500 (KR). **SMIRNOV, Vadim V.** [RU/RU]; Tusukrovsi Avenue, 1/13-321, Saimt-Fetervruga (RU). **LEE, Hyun, Soo** [KR/KR]; #102-502, Hytsu Apt, Sagen-dong, Sungdong-gu, Seoul 133-060 (KR).

(74) Agent: **LEE, Jong, Il**; #904 BYC Building, 648-1, Yeoksam-dong, Kangnam-gu, Seoul 135-080 (KR).

(81) Designated States (national): JP, US.


(84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

**Published:**

— Without international search report and to be republished upon receipt of that report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: 3-DIMENSIONAL IMAGING SCREEN FOR MULTI-VIEWER

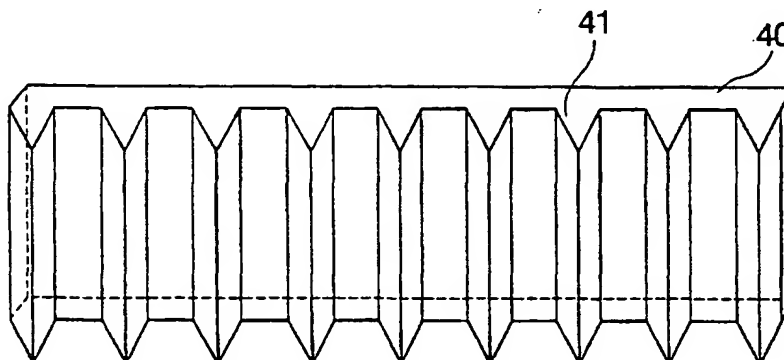

(57) Abstract: The present invention employs a beam dividing prism corresponding to a size of a single pixel on a screen in order to create a plurality of viewing zones for multi-viewer, in which a prism panel having a 1-dimensional or 2-dimensional arrangement of a prism cell for dispersing beam in various directions is coupled to the 3-dimensional image projection screen in order to increase the number of the viewing zones, and in which the number and position of the available viewing zones are determined by the number and a relative position of disperse surfaces in the prism cell. By using the present invention, the desired number of the viewing zones can be created by selectively adopting the prism cells, so realizing the 3-dimensional image display system for multi-viewer.

WO 01/04665 A2

### 3-DIMENSIONAL IMAGING SCREEN FOR MULTI-VIEWER

#### TECHNICAL FIELD

The present invention relates to a 3-dimentional imaging screen for multi-viewer, and in particular to a 3-dimentional imaging screen for simultaneously watching a 3-dimentional image by multi-viewer without wearing glasses, in which the screen comprises a beam dividing prism corresponding to a pixel on screen, the beam dividing prism dividing an incident beam on the screen into a vertical and/or horizontal direction according to the shape thereof.

#### BACKGROLUND ART

It has been studied about a display device with which viewers may watch a conventional 2-dimentional image, such as television image, like a 3-dimentional image. In order to watch the conventional 3-dimentional image, the viewers generally wear a pair of polarized glasses which make the 3-dimentional image, by using a visual timing difference, from the 2-dimentional images which were made by using a plurality of cameras when taking images for a television program or movie.

For an example, the US 4,559,556 discloses a system for viewing three dimensional images. The viewing system comprises a filter mat having two juxtaposed polarizing filters for placement over a television viewing screen or other rear surface projection device in substantial registry with two similarly juxtaposed and slightly different images of a common scene or subject. The polarizing filters are oriented on different axes to polarize the light from the two images on different axes. The viewer observes these polarized images through eyeglasses.

However, it has caused expenses and inconvenience according to the manufacturing the conventional 3-dimensional image and using glasses. In order to overcome the problems, there is developed a 3-dimensional image screen by a viewing zone recently, in which the 3-dimensional image screen by the viewing zone embodies the 3-dimensional image on the image incident screen itself, which enables a lot of viewer to watch the image without wearing the polarized glasses.

Preferably the viewing zone for displaying the 3-dimensional image should be generated as many as possible. For that reason, there is a method that a plurality of image incident devices are used as many as the viewing zones with use of such as a lenticular, a spherical reflective panel or a Fresnel lens for projecting the image. In addition, there is another method which uses a holographic screen for generating a plurality of viewing zones on a single screen.

The holographic screen uses a hologram serving as a kind of optical elements. When writing the hologram, the holographic screen writes several phases of an oriented object having different direction on one hologram by multi-exposing with moving position of a photosensitive panel or the object, or with moving the position of the photosensitive panel and with changing the object itself.

The method for generating a plurality of viewing zones with use of a lenticular, a spherical reflective panel or a Fresnel lens can be easily embodied for providing the 3-dimensional image but not good in efficiency. Particularly, though it can enlarge size of screen for expanding the size of the viewing zone, the lenticular screen is still inefficient in fact that only a few viewers can watch the screen in comparison with the size of the screen.

In detail, the method for expanding size of the viewing zone with use of the

lenticular screen may be achieved by enlarging the size of the lenticular lens and increasing the number of the images in different viewing directions. For example, assuming that a shoulder of a viewer has a width of about 40cm, the viewing zone requires at least 80cm width for two viewers to watch the 3-dimensional image at the same time. Assuming that a distance between eyes is 6.5cm, at least 13 images having different viewing directions are required in order to form the 80cm width viewing zones. Therefore, there is a technical limitation in that the number of the images having different viewing directions as well as the size of the projection lens should be continuously increased because the viewing zone size should be steadily increased by over 40cm in order to increase the number of viewers at the same time.

Accordingly, the method to expand the size of the viewing zone among various methods for multi-viewer is not efficient comparing with the method increasing the number of the viewing zones.

In addition, multi-exposure hologram using the holographic screen also has some problems in a screen brightness because the diffraction efficiency decreases in an inverse proportion to a root value of the number of the multi-exposure.

### **DISCLOSURE OF THE INVENTION**

The present invention is designed to solve the above problems. Therefore, an object of the present invention is to provide a 3-dimensional imaging screen for multi-viewer which maintains a proper screen brightness on the single screen such that a plurality of viewers can watch the screen at the same time, and which configures the number of the viewing zones according to the number of the viewers.

The object of the present invention is accomplished by providing a

configuration of a screen, which can make the number of the viewing zone increased, resulting that the multi-viewer may watch the 3-dimentional image simultaneously.

The technical spirit of the present invention is achieved by using a prism panel together with a 3-dimentional image projection screen, in which the prism panel  
5 consists of an 1-dimentional or 2-dimentional array of prism cells which can disperse a projected image to each direction determined by each pixel.

In other words, the 3-dimentional imaging screen for multi-viewer which projects an object on the screen such that viewers watch a 3-dimentional image, wherein the screen comprises a 3-dimentional image projection screen positioned to a direction  
10 of an incident beam of the image, and a prism panel is formed with prism cell having a plurality of disperse surfaces of the incident beam on a rear surface of the 3-dimentional image projection screen, whereby the number of viewing zones is corresponding to the number of the disperse surfaces of the prism cell.

The prism panel is coupled to the rear surface of the 3-dimentional image  
15 projection screen, and the 3-dimentional image projection screen has enough thickness not to generate an interference effect such as a moir\_ interference pattern.

The prism panel is installed to the rear surface of the 3-dimentional image projection screen having a predetermined distance therebetween, and the distance between the 3-dimentional image projection screen and the prism panel is properly  
20 spaced apart not to generate the interference effect such as a moir\_ interference pattern.

The prism panel is formed and integrated to the rear surface of the 3-dimentional image projection screen in a emboss or engrave manner, and the 3-dimentional image projection screen has enough thickness not to generate the interference effect such as moir\_ interference pattern.

**BRIEF DESCRIPTION OF THE DRAWINGS**

Other objects, features and advantages of the present invention will become more apparent from the description of a preferable embodiment with reference to the  
5 drawings, in which;

FIG. 1 is for showing a principle of forming a viewing zone of an image projection screen having characteristics of a spherical reflective panel,

FIG. 2 is for showing a principle of forming a viewing zone of an image projection screen having characteristics of a lens,

10 FIGs. 3A, 3B and 3C show configurations of prism panels in accordance with one embodiment of the present invention,

FIG. 4 shows configurations of various types of prisms forming a prism panel of the present invention,

15 FIG. 5 shows a configuration of a 3-viewing zone prism panel according to another embodiment of the present invention,

FIG. 6 shows a configuration of a 7-viewing zone prism panel according to still another embodiment of the present invention,

FIGs. 7A and 7B are for illustrating an embodiment of 3-dimentional image screen for multi-viewer of the present invention, and

20 FIG. 8 is for showing still another embodiment of 3-dimentional image screen for multi-viewer of the present invention.

**BEST MODE FOR CARRYING OUT THE INVENTION**

Hereinafter, configurations and operations of embodiments of the invention

will be described with the reference to the accompanying drawings in detail. First of all, for the best understanding of the present invention, there will be explained a principle for forming a viewing zone in the image projection system.

FIG. 1 is for showing how the viewing zone is formed in case of projecting an image on an image projection screen having characteristics of a spherical reflective mirror.

As shown in FIG. 1, the image displayed on an image display screen 2 of an image generating unit 1 is projected on the image projection screen 6 through a projection lens 3. The image 5 projected on the image projection screen 6 can be watched by viewers in an area, where an image of an egress opening unit 4 of the projection lens 3 is shown up by way of the image projection screen 6. The area where the image of the egress opening unit 4 of the projection lens 3 is shown is called a viewing zone.

FIG. 2 is for showing a principle how the viewing zone is formed in case of projecting image on an image projection screen having lens characteristics.

As shown in FIG. 2, a first object 10 and a second object 11 are shown as images 16, 17 of projection lens 12, 13 and egress opening units 14, 15 respectively onto an image projection screen 18. The image projection screen 18 forms the images of the egress opening units 14, 15 of the projection lens 12, 13 on a first viewing zone 19 and a second viewing zone 20.

FIG. 3A is for illustrating a configuration of a prism panel applied to a 3-dimensional image projection screen of the present invention.

FIG. 3B is for illustrating a reflection effect of an incident beam according to a configuration of a prism cell, in case that the prism cell is a reflective type.

FIG. 3C shows a configuration of a prism cell having a disperse surface of an incident beam corresponding to the number of required viewing zones.

As shown in FIG. 3A, the prism panel 30 of the present invention has an 1-dimensional or 2-dimensional arrangement in which the prism cells 31 are in contact  
5 each other for dispersing the incident beam 32 to different directions.

As shown in FIG. 3B, when the prism cell 31 is in use of reflection, a surface 35 of the prism cell should be coated to reflect the incident beam completely. The number of the disperse surfaces in the prism cell 31 is corresponding to the number of the required viewing zones as shown in FIG. 3, and the surfaces are in contact each  
10 other at a constant angle.

Referring to FIG. 3B, reflection and transmission characteristics of the incident beam is explained now in either case that the prism cell is a reflective type and transmitting type.

When the prism cell is a spherical reflective type, a front surface 36 of the  
15 prism, or two disperse surfaces 38, 39 which are not parallel to the incident surface of the beam are symmetric to a normal direction of the prism panel 30 and when an angle therebetween is  $\theta$ , the beam 34 on the paper plane incident at an angle  $\alpha$  to the normal direction 33 is reflected at an angle of  $[180^\circ - \theta + \alpha]$  to the normal direction 33 on the disperse surface 38 and is reflected at the angle of  $[180^\circ - \theta - \alpha]$  on the disperse surface 39.  
20 And the beam 34 is reflected at an  $\alpha$  angle on the disperse surface 37 parallel to the front surface 36 of the prism. Therefore, preferably, the angle  $\theta$  should be as close as  $180^\circ$  in order to remove the reflection effect generating between the disperse surfaces.

In addition, in case that the prism cell is a transmitting type, the surface 35 of the prism cell 31 does not require the reflective coating. In that case, if the refractivity

of the prism cell is  $n$ , a transmitting angle of the incident beam to the disperse surface is  $\sin^{-1}\{n \cos(\theta/2 - \alpha)\}$  in case of the disperse surface 38 of the FIG. 3b, and  $\sin^{-1}\{n \cos(\theta/2 + \alpha)\}$  in case of the disperse surface 39 and  $\sin^{-1}(n \sin \alpha)$  in case of the disperse surface 37. Accordingly, the position of each viewing zone can become closer or  
5 farther in accordance with the angle  $\theta$ .

In accordance with the reflecting or transmitting characteristics of the prism cell, positions of various directions and the number of the viewing zones which are required for forming the viewing zone of the 3-dimensional imaging screen for multi-viewer, may be determined.

10 FIG. 4 is for illustrating various types of prism cells applied to the 3-dimensional image screen for multi-viewer of the present invention.

When requiring the viewing zone to be positioned in a vertical or horizontal direction, the prism cells can be applied to have various embossing or engraving shapes according to the number of the viewing zones. In other words, when the number of the  
15 viewing zones is 2, the prism cell has a triangle shape (a), when the number of the viewing zones is 3, the prism cell has a dove shape (b), when the number of the viewing zones is 4, the prism cell has a tetragonal type (d), when the number of the viewing zones is 5, the prism cell has a pentagonal type (d), \_ and etc. The length of the prisms is at least the same as or longer than the height of the image projection screen. In  
20 addition, it is preferred that the width of the prism cells is narrower than a width of one pixel which is projected on the image projection screen in case that the prism cell has 2-dimensional arrangement. It is the reason that the resolution thereof would be degraded when the width is larger than a single pixel size. However, the width and the number of the disperse surfaces should be selected to minimize the diffraction.

phenomena because the viewing zone of each viewing point can be overlapped by the diffraction according to each disperse surface in case of multi-viewing zone image when a pitch or width of the disperse surface is too small.

Additionally, in case of requiring that the position of the viewing zone is to be  
5 formed to vertical, horizontal and middle directions at the same time, the prism cell has types of a truncated triangular pyramid (e), a truncated tetragonal pyramid (f), a truncated pentagonal pyramid (g), a truncated hexagonal pyramid (h), and etc. having various embossing and engraving shapes according to the required number of viewing zones. In this case, the projection on the respective disperse surface should be applied  
10 to have same area in order to maintain the same brightness of each viewing zone. And it is preferred that the width of the prism cell is smaller than a width of a single pixel of an image projected on the image projection screen in case that the prism cell has 2-dimensional arrangement. When the width is larger than a single pixel, the resolution is degraded. However, because, when a pitch or the width of the disperse surface is  
15 too small, the viewing zones can be overlapped owing to a diffraction of each disperse surface in a multi-viewing case, the width and the number of the disperse surface should be selected to minimize the diffracting phenomena.

FIG. 5 shows an example in which the prism cell in an 1-dimensional arrangement has a 3-viewing zone prism panel according to another embodiment of the  
20 present invention. By way of the prism panel 40 of FIG. 5, the prism cell 41 of a truncated triangular pyramid type having various embossing and engraving shapes has an 1-dimensional arrangement such that it is capable of generating the 3 viewing zone to a desired vertical or horizontal direction.

FIG. 6 shows an example in which the prism cell in a 2-dimensional

arrangement has a 7-viewing zone panel according to still another embodiment of the present invention. According to a prism panel 50 of FIG. 6, the prism cell 51 of a truncated hexagonal pyramid (h) type having various embossing and engraving shapes has a 2-dimensional arrangement in order to form 7-viewing zones in upper, lower, left, right and center directions which are determined by a relative positions of the disperse surfaces in the prism cell 51. In this case, the prism panel can be rotated to form the viewing zone to a desired direction. And an angle between the prism cells should be near to  $180^\circ$  in order not to cause the reflection effect therebetween.

Now, it will be explained about configurations and operations of embodiments of the 3-dimensional image screen for multi-viewer which employs a prism panel having prism cells applied to the 3-dimensional image screen for multi-viewer of the present invention, in detail.

FIGs. 7A and 7B show embodiments that the viewing zone is formed by a prism panel having a reflective coating and a 3-dimensional image screen for multi-viewer of the present invention.

The screen of the present invention shown in FIG. 7 comprises an object 60 to be projected, a projection lens 61 installed apart from the object 60 at a constant distance, an egress opening unit 62 installed adjacent to a projecting direction of the projection lens 61, a 3-dimensional image projection screen 64 for transmission installed opposite to and apart from the object 60 at a constant distance, and a prism panel 66 formed by prism cells 68 coupled to an even surface which is a rear surface of the 3-dimensional image projection screen 64.

The 3-dimensional image projection screen is made by a transparent material such as a flannel lens or a projective holographic screen. In addition, the prism cell 68

of the prism panel 66 is configured by arranging the prism cell having the truncated triangular pyramid (e) type for generating a 3-viewing zone in an 1-dimentional arrangement.

To describe an operation of generating a viewing zone on the screen of the present invention having the above configuration, a beam for the object 60 projected by the light source (not shown in figure) is focused and diffused through the projection lens 61 and the egress opening unit 62 and then projected as an image on the 3-dimentional image projection screen 64. The beam providing the projected image 63 on the 3-dimentional image projection screen 64 is reflective by the disperse surfaces 69, 70, 71 of the respective prism cell 68 of the prism panel 66 coupled to the rear of the 3-dimentional image projection screen 64, then is dispersed to 3 other directions in order to form an image of the egress opening 62, or the viewing zone, in a position of the projection lens 61. In this case, the first viewing zone 72 is form by the disperse surface 71 of the prism cell 68, the second viewing zone 73 is formed by the disperse surface 69, and the third viewing zone 74 is formed by the disperse surface 70.

In order to move a position of the viewing zone in this case, a thickness of the prism panel 66 is not constant, but can be decreased or increased to a width or height direction. In other words, the position of the viewing zone is moved proportional to a change of thickness of the prism panel.

In addition, the prism panel 66 is coupled to the even rear surface of the 3-dimentional image projection screen 64 of the 3-dimentional image screen for multi-viewer in order to form the above viewing zone, referring to FIG. 7a. It is not concerned that the screen 64 may be coupled to an even surface of the prism panel 66 or to a surface of the prism panel having the embossing and engraving shapes. It is the

reason that the surface having the embossing and engraving shapes of the prism cell has a reflective coating formed on a surface thereof, in case of reflective type.

Additionally, it is possible to form the prism cell on the even rear surface of the 3-dimentional image projection screen 64 by embossing or engraving the even rear  
5 surface. In this case, the thickness of the 3-dimentional image projection screen 64 should be enough not to have the moir\_ interference pattern.

The 3-dimentional image projection screen 64 and the prism panel 66 may be contacted each other or be apart from each other having a constant distance. When requiring the constant distance between the 3-dimentional image projection screen 64  
10 and the prism panel 66, the distance should be adjusted properly not to have an interference effect such as moir\_ interference pattern which may be generated on the 3-dimentional image projection screen 64 by the reflective beam of the disperse surface of the prism cell according to the configuration of the 3-dimentional image projection screen 64.

15 FIG. 8 is for illustrating how the viewing zone is generated by the configuration of the 3-dimentional image screen for multi-viewer when the screen is a transmitting type.

Referring to FIG. 8, the screen comprises an object 80 to be projected, a projection lens 81 installed apart from the object 80 at a constant distance, an egress  
20 opening unit 82 installed adjacent to a projecting direction of the projection lens 81, a 3-dimentional image projection screen 84 installed apart from the object 80 at a constant distance, and a prism panel 85 formed by a transmitting prism cell coupled to a rear surface of the 3-dimentional image projection screen 84.

The type, configuration and coupling state of the 3-dimentional image

projection screen 84 and the prism panel 85 are identical to those in FIGs. 7A and 7B. However, it is different only in this point not to form a reflective coating on the surface of the prism cell such that the prism cell serves in a transmitting type.

Accordingly, the viewing zones are formed at an opposite position to the  
5 projection lens 81 by the projection screen of the present invention. That is, it can be seen that the first viewing zone 86, the second viewing zone 87, and the third viewing zone 88 are created at a position constant apart from the prism panel in a predetermined distance.

As described above, by coupling the 3-dimensional image screen, comprised by  
10 the flannel lens or the projective holographic screen and various types of the prism cells, on the prism panel having the 1-dimensional or 2-dimensional arrangement, the present invention provides an advantage that the number of viewing zones and the location can be formed according to the prism cell, as desired. And also, according to the screen of the present invention, it may be efficient that the multi-viewer may watch the image on  
15 the single screen without any damage of the resolution of the display by configuring the size of the disperse surface of the prism cell after determining and adjusting relationship with the size of the single pixel of the image.

The present invention is not limited to the specifically disclosed embodiments, and variations and modifications may be made without departing from the scope of the  
20 present invention.

**What is claimed is:**

1. A 3-dimentional imaging screen for multi-viewer which projects an object on the screen such that viewers watch a 3-dimentional image, the screen  
5 comprising:

a 3-dimentional image projection screen positioned to a direction of an incident beam of the image, and

a prism panel formed with prism cell having a plurality of disperse surfaces of the incident beam on a rear surface of the 3-dimentional image projection screen,

10 whereby the number of viewing zones is corresponding to the number of the disperse surfaces of the prism cell.

2. A 3-dimentional imaging screen for multi-viewer as claimed in claim 1, wherein the prism panel is coupled to the rear surface of the 3-dimentional image  
15 projection screen, and the 3-dimentional image projection screen has enough thickness not to generate an interference effect such as a moir\_ interference pattern.

3. A 3-dimentional imaging screen for multi-viewer as claimed in claim 1, wherein the prism panel is installed to the rear surface of the 3-dimentional image  
20 projection screen having a predetermined distance therebetween, and the distance between the 3-dimentional image projection screen and the prism panel is properly spaced apart not to generate the interference effect such as a moir\_ interference pattern.

4. A 3-dimentional imaging screen for multi-viewer as claimed in claim

1, wherein the prism panel is formed and integrated to the rear surface of the 3-dimensional image projection screen in a emboss or engrave manner, and the 3-dimensional image projection screen has enough thickness not to generate the interference effect such as moir\_ interference pattern.

5

5. A 3-dimensional imaging screen for multi-viewer as claimed in claim 1, wherein the prism panel is configured by that the prism cell of which a size is corresponding to a size of one pixel of the projected image on the 3-dimensional image projection screen is formed in an emboss or engrave manner in an 1-dimensional arrangement.

10

6. A 3-dimensional imaging screen for multi-viewer as claimed in claim 5, wherein a height of the prism cell is equal to or higher than a height of the 3-dimensional image projection screen, and a width of the prism cell is equal to or narrower than a width of one pixel of the projected image on the 3-dimensional image projection screen.

15

7. A 3-dimensional imaging screen for multi-viewer as claimed in claim 5, wherein the width of the prism cell is wider than the width of the pixel of the projected image on the 3-dimensional image projection screen.

20

8. A 3-dimensional imaging screen for multi-viewer as claimed in claim 5, wherein the prism cell is configured into one of a triangular prism, a dove prism, a tetragonal prism, a pentagonal prism, a hexagonal prism, etc., according to the number

of required viewing zones.

9. A 3-dimentional imaging screen for multi-viewer as claimed in claim 1, wherein the prism panel is configured by that the prism cell of which a size is  
5 corresponding to a size of one pixel of the projected image on the 3-dimentional image projection screen is formed in an emboss or engrave manner in a 2-dimentional arrangement.

10. A 3-dimentional imaging screen for multi-viewer as claimed in claim  
10 9, wherein a sectional area of the prism cell is equal to or smaller than area of the pixel of the projected image on the 3-dimentional image projection screen.

11. A 3-dimentional imaging screen for multi-viewer as claimed in claim  
15 9, wherein a sectional area of the prism cell is greater than area of the pixel of the projected image on the 3-dimentional image projection screen.

12. A 3-dimentional imaging screen for multi-viewer as claimed in claim  
9, wherein the prism cell is configured into one of a triangular prism, a tetragonal prism, a pentagonal prism, a hexagonal prism, etc., according to the number of required  
20 viewing zones.

13. A 3-dimentional imaging screen for multi-viewer as claimed in any one of claims 1 to 12, wherein a thickness of the prism panel is constant or the thickness of the prism panel is decreased or increased in a constant ratio to a width or height

direction.

14. A 3-dimensional imaging screen for multi-viewer as claimed in claim 13, wherein the prism cell has a reflective coating formed on a surface thereof.

5

15. A 3-dimensional imaging screen for multi-viewer as claimed in claim 14, wherein an angle between the disperse surfaces in prism cell is near to 180 degrees.

1/7

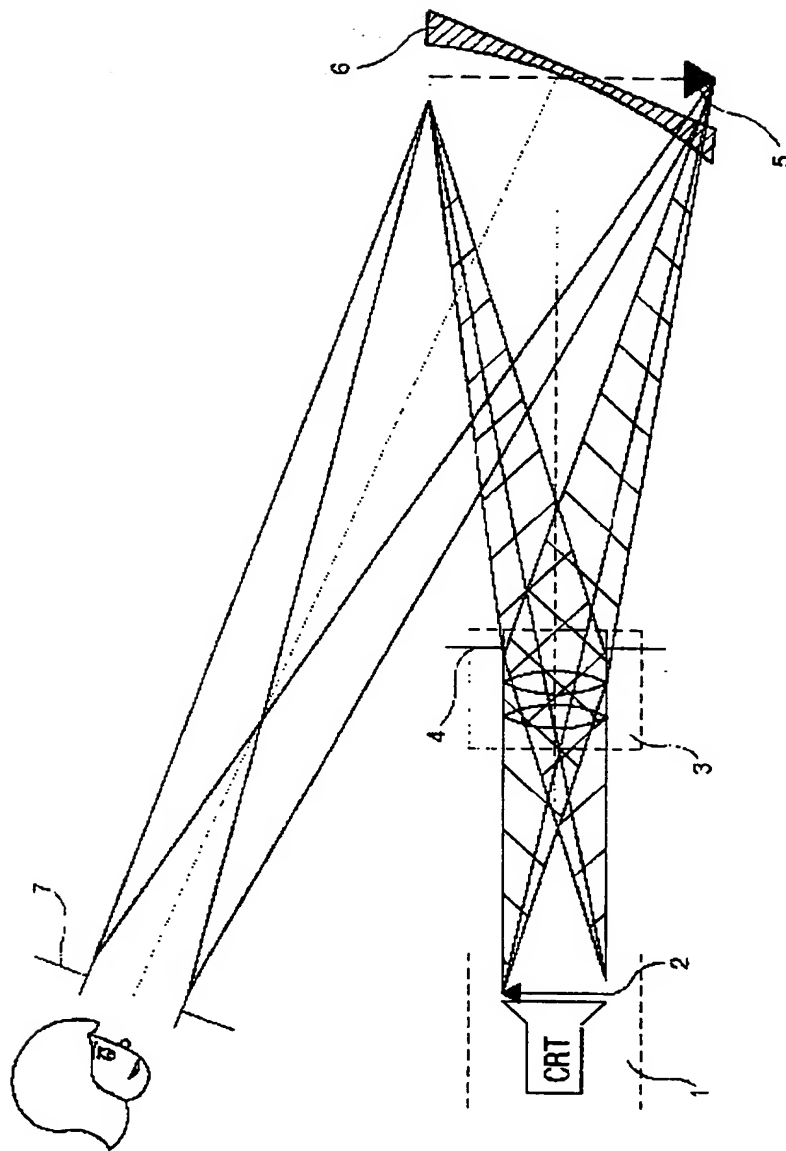


FIG. 1

2/7

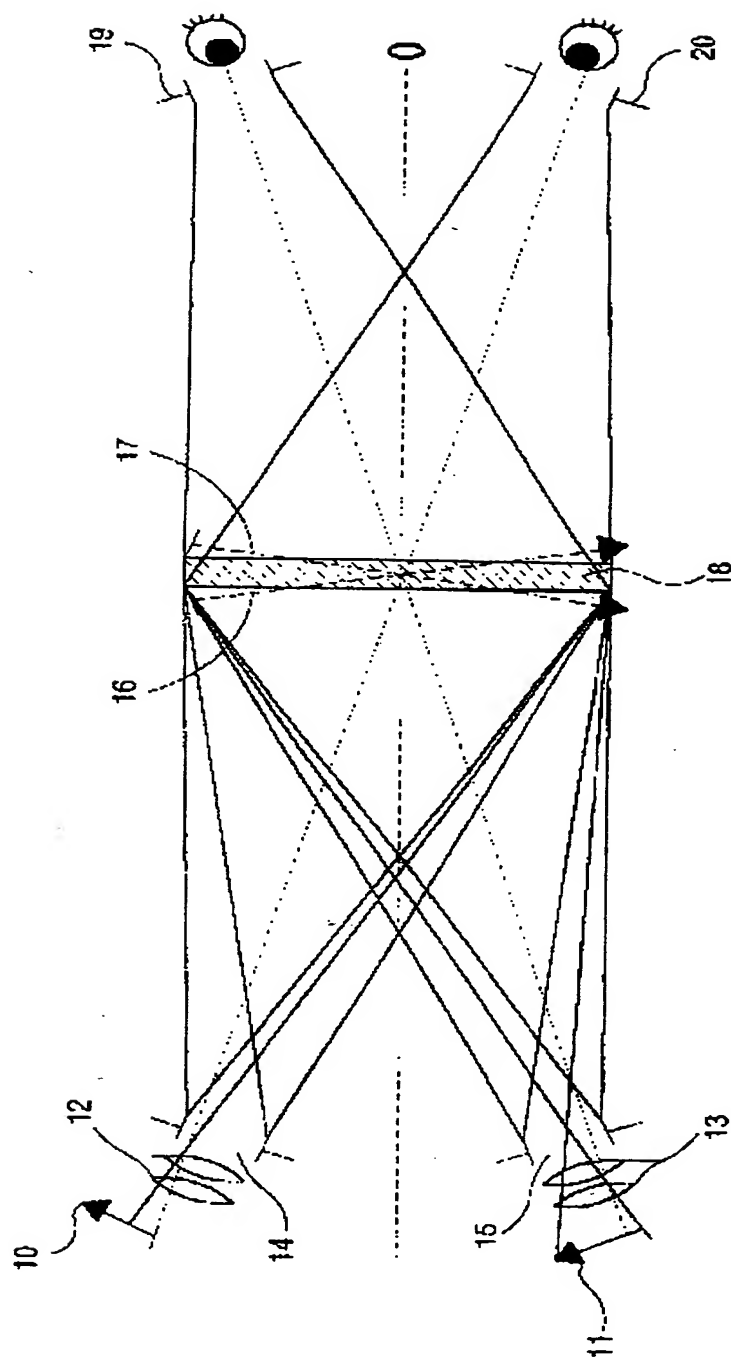


FIG. 2

3/7

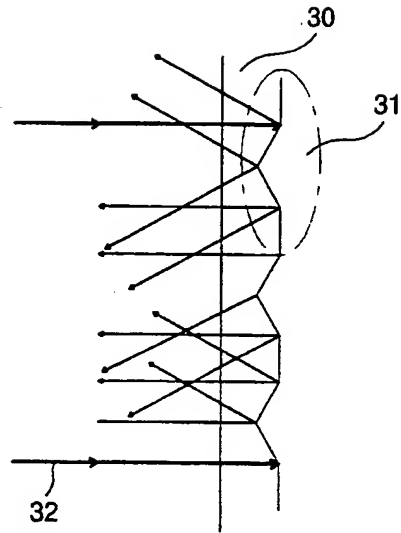


FIG. 3A

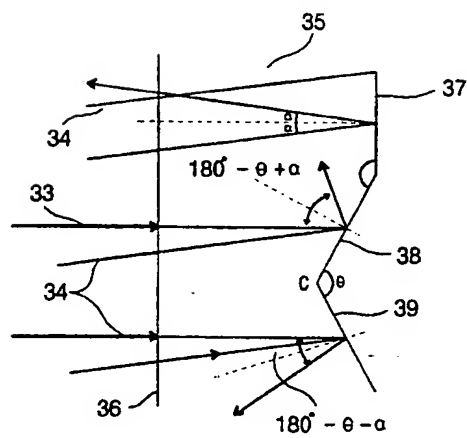


FIG. 3B

4/7




FIG. 3C



(a)




(b)




(c)




(d)




(e)



(f)



(g)



(h)

FIG. 4

5/7

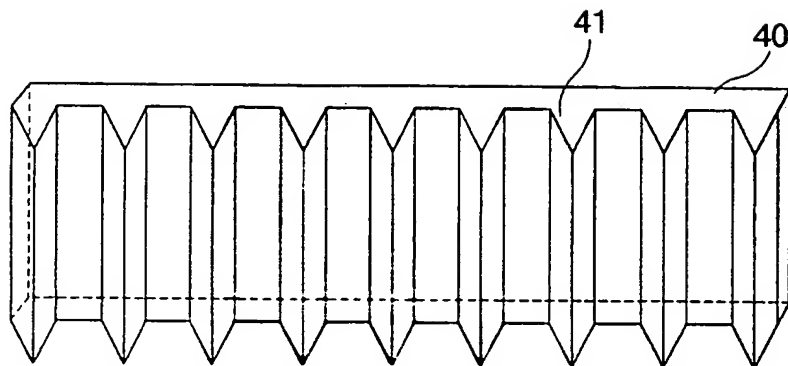


FIG. 5

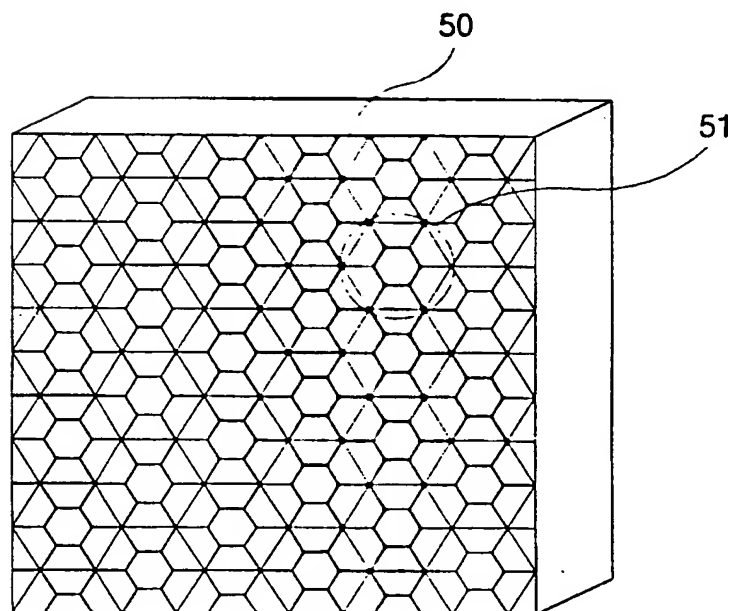


FIG. 6

6/7

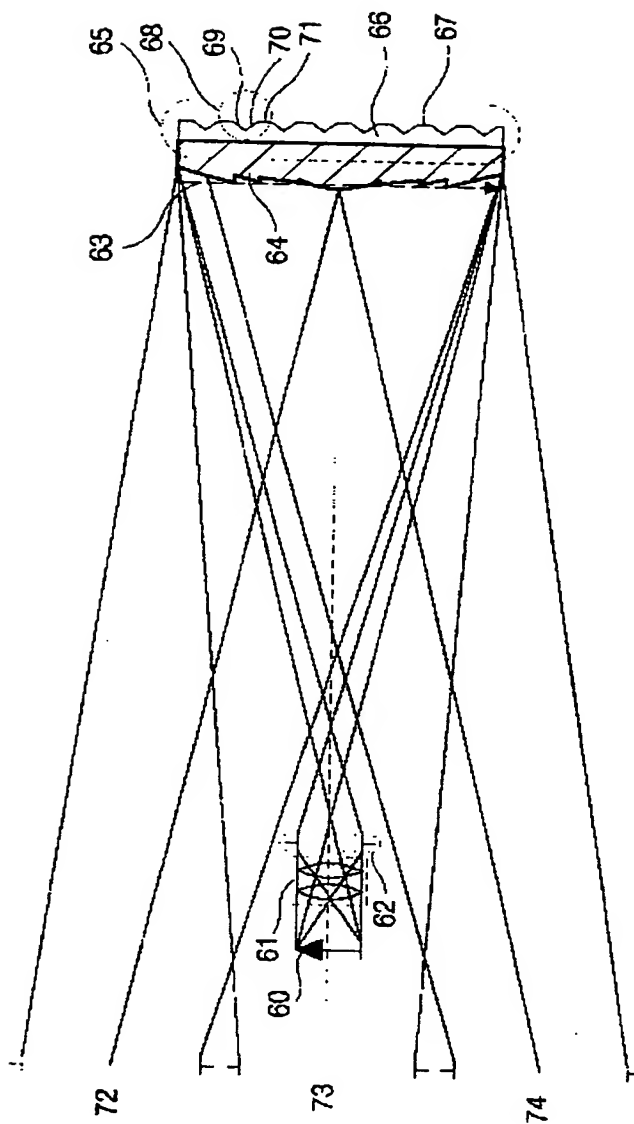


FIG. 7A



FIG. 7B

7/7

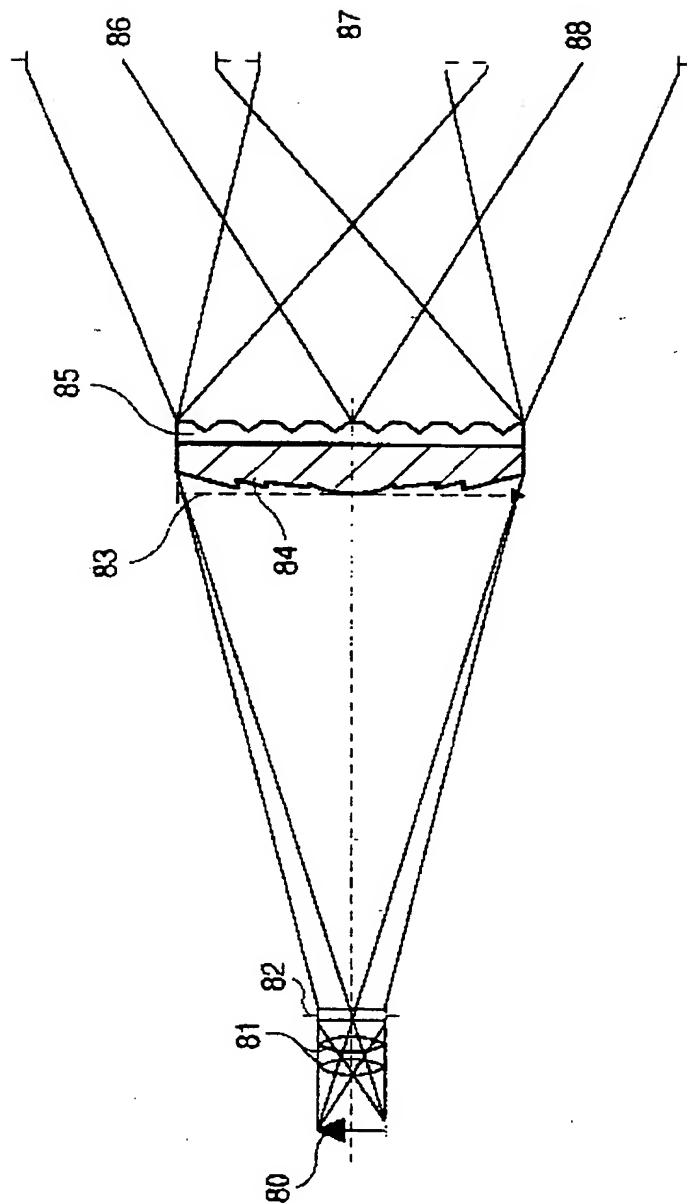


FIG. 8



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
18 January 2001 (18.01.2001)

PCT

(10) International Publication Number  
**WO 01/04665 A3**

(51) International Patent Classification<sup>7</sup>: **G02B 27/22**,  
27/24, G03B 21/56

Kyeongki-do 463-500 (KR). SMIRNOV, Vadim . V.  
[RU/RU]; Tusukrovsi Avenue, 1/13-321, Saimt-Fetervruga  
(RU). LEE, Hyuk, Soo [KR/KR]; #102-502, Hytsu Apt,  
Sagen-dong, Sungdong-gu, Seoul 133-060 (KR).

(21) International Application Number: PCT/KR00/00760

(22) International Filing Date: 13 July 2000 (13.07.2000)

(74) Agent: LEE, Jong, Il; #904 BYC Building, 648-1, Yeok-  
sam-dong, Kangnam-gu, Seoul 135-080 (KR).

(25) Filing Language: English

(81) Designated States (*national*): JP, US.

(26) Publication Language: English

(84) Designated States (*regional*): European patent (AT, BE,  
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,  
NL, PT, SE).

(30) Priority Data:  
1999/28253 13 July 1999 (13.07.1999) KR

(71) Applicant (*for all designated States except US*): KOREA  
INSTITUTE OF SCIENCE AND TECHNOLOGY  
[KR/KR]; #39-1 Hawolgok-dong, Sunbuk-gu, Seoul  
136-791 (KR).

Published:  
— with international search report


(88) Date of publication of the international search report:  
9 August 2001

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): SON, Jung,  
Young [KR/KR]; #301-201, Hanyanmaeul Grand  
Villd, 111, Gumi-dong, Bundang-gu, Sungnam-City,

*For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.*

(54) Title: 3-DIMENSIONAL IMAGING SCREEN FOR MULTI-VIEWER

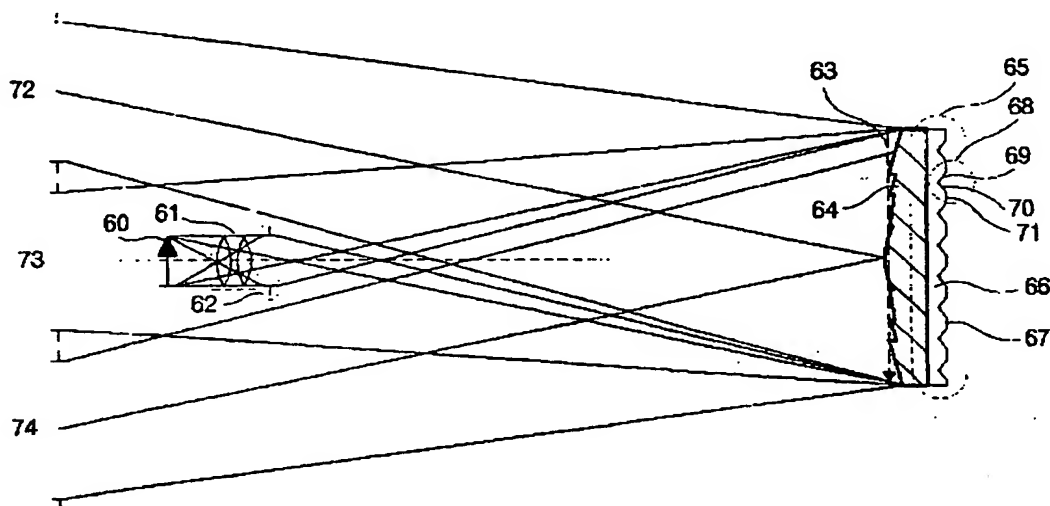

(57) Abstract: The present invention employs a beam dividing prism corresponding to a size of a single pixel on a screen in order to create a plurality of viewing zones for multi-viewer, in which a prism panel (66) having a 1-dimensional or 2-dimensional arrangement of a prism cell (68) for dispersing beam in various directions is coupled to the 3-dimensional image projection screen (64) in order to increase the number of the viewing zones, and in which the number and position of the available viewing zones (72, 73, 74) are determined by the number and a relative position of disperse surfaces (69, 70, 71) in the prism cell (68). By using the present invention, the desired number of the viewing zones (72, 73, 74) can be created by selectively adopting the prism cells (68), so realizing the 3-dimensional image display system for multi-viewer.

WO 01/04665 A3

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/KR 00/00760

## CLASSIFICATION OF SUBJECT MATTER

IPC<sup>7</sup>: G 02 B 27/22, 27/24; G 03 B 21/56

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC<sup>7</sup>: G 02 B 27/22, 27/24, 5/04; G 03 B 21/56

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPOQUE (WPI, EPODOC)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 09 274159 A (TOPPAN PRINTING CO.) 21 October 1997 (21.10.97) figs. 1-4.	1,2,13
A	US 5064273 A (LEE) 12 November 1991 (12.11.91) column 3, line 19 - column 5, line 9.	1-3,13
A	DE 2248873 A (CANON) 12 April 1973 (12.04.73) figs. 2-5, page 4, line 10 - page 5, line 6.	1,2
A	US 4390239 A (HUBER) 28 June 1983 (28.06.83) abstract, column 3, line 11 - column 4, line 68.	1,2,8,12,13

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

### \* Special categories of cited documents:

„A“ document defining the general state of the art which is not considered to be of particular relevance

„E“ earlier application or patent but published on or after the international filing date

„L“ document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

„O“ document referring to an oral disclosure, use, exhibition or other means

„P“ document published prior to the international filing date but later than the priority date claimed

„T“ later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

„X“ document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

„Y“ document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

„&“ document member of the same patent family

Date of the actual completion of the international search

9 October 2000 (09.10.2000)

Date of mailing of the international search report

13 February 2001 (13.02.2001)

Name and mailing address of the ISA/AT

Austrian Patent Office  
Kohlmarkt 8-10; A-1014 Vienna

Facsimile No. 1/53424/535

Authorized officer

GRONAU

Telephone No. 1/53424/320

Form PCT/ISA/210 (second sheet) (July 1998)

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR 00/00760

Patent document cited in search report			Publication date	Patent family member(s)			Publication date
DE	A1	2248873	12-04-1973	GB	A	1403783	20-08-1975
DE	B2	2248873	11-01-1979	JP	A2	48043629	23-06-1973
DE	C3	2248873	30-08-1979	US	A	4078854	14-03-1978
JP	A	09274159 A2		none			
US	A	4390239	28-06-1983	AT	E	5921	15-02-1984
				DE	A1	3018449	19-11-1981
				DE	C2	3018449	05-01-1983
				EP	A2	39768	18-11-1981
				EP	A3	39768	25-11-1981
				EP	B1	39768	18-01-1984
				JP	A2	57006833	13-01-1982
US	A	5064273	12-11-1991	KR	Y1	9201308	22-02-1992

**THIS PAGE BLANK (USPTO)**